

PeakForm® SILHOUETTE® 尖峰顶端® 4000型凹槽龙骨

15mm (9/16") Bolt-Slot Systems
15mm凹槽龙骨系统

Physical Data 产品数据

Material 材质
Hot dipped galvanized steel
热镀锌钢板

Surface Finish 表面涂料
Baked polyester paint
聚酯烤漆

Cross Tee / Main Beam Interface
副龙骨/主龙骨连接方式
Mitered
斜接




End Detail 端部
Main Beam: Coupling
主龙骨: 联轴器式
Cross Tee: XL
副龙骨: XL 外接式钢插头

Warranty 品质保证
10-year limited warranty; 15-year
with HumiGuard™ Plus products
十年有限品质保证, 如与阿姆斯壮防潮
工程板系列配合使用, 更可享受十五年保证

Recycled Content:
再生材料

25%

Color
颜色

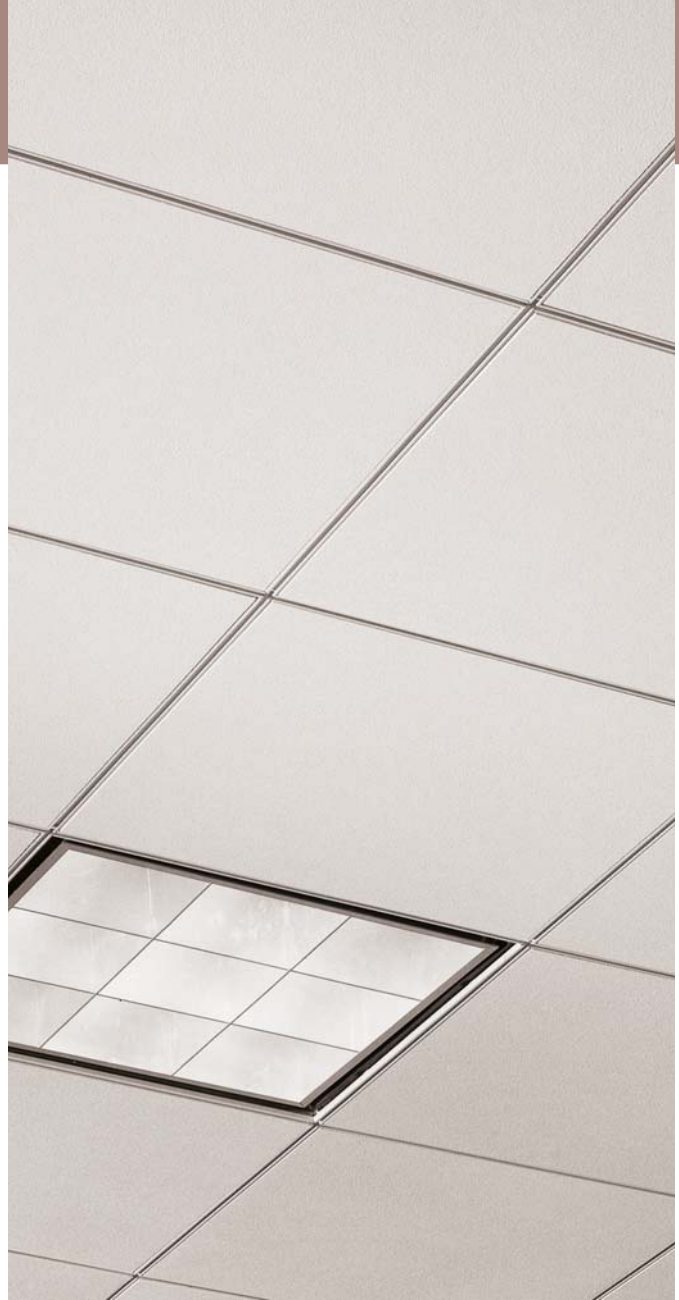


PeakForm SILHOUETTE
15mm Bolt-Slot System
with 6mm Reveal
尖峰顶端4000型15mm凹槽
龙骨6mm槽宽




PeakForm SILHOUETTE
Main Beam
尖峰顶端4000型主龙骨




PeakForm SILHOUETTE
Cross Tee
尖峰顶端4000型副龙骨




45mm SILHOUETTE
Main Beam/Cross Tee
4000型45H主龙骨/副龙骨




38mm SILHOUETTE
Main Beam/Cross Tee
4000型38H主龙骨/副龙骨



Angle Molding
边龙骨



Shadow Molding
阶梯型边龙骨



MCC4
clip used to
cover unused miter
斜切口遮盖件

OPTIMA with PeakForm SILHOUETTE 15mm with 6mm Reveal Bolt-Slot Gird
极致配尖峰顶端4000型15mm凹槽龙骨6mm槽宽

SHANGHAI 上海
TEL电话: (8621) 6391 3366
FAX传真: (8621) 6391 3399

GUANGZHOU 广州
TEL电话: (8620) 8375 3862
FAX传真: (8620) 8375 3861

BEIJING 北京
TEL电话: (8610) 6517 1061
FAX传真: (8610) 6510 2821

HONGKONG 香港
TEL电话: (852) 2585 7800
FAX传真: (852) 2598 7113

www.armstrong-asia.com
www.armstrong.cn

08-2009
Printed in Shanghai, PRC

CEILING SYSTEMS
天花板 系列

你我共创 理想天地
Between us, ideas become reality™

Armstrong®

阿 姆 斯 壯

PeakForm® SILHOUETTE® 尖峰顶端® 4000型凹槽龙骨

15mm (9/16") Bolt-Slot Systems
15mm凹槽龙骨系统

Relative Installed Cost
相对安装成本

\$	\$\$	\$\$\$	\$\$\$\$
----	------	--------	----------



Key Selection Attributes 主要特性:

- Rotary-stitched during manufacture by a patented method for additional torsional strength and extra stability during installation; maintains size and shape of reveal when cutting perimeter tees
旋转咬合的专利生产技术增加抗扭强度和安装稳定性，收边切割时可保证槽口的尺寸及形状不变
- Choice of black and white reveal
备有黑色和白色凹槽可供选择
- PeakForm® patented profile increases strength and stability for improved performance during installation
尖峰顶端专利设计的截面能增强龙骨安装的强度和稳定性
- XL stacked-on end detail provides secure locked connection
铆接的XL钢接头能保证连接的可靠性
- The performance of the Armstrong Seismic RX™ Suspension System is based on the specific combination of components and method of installation. Other manufacturer's components and installation methods were not tested and are not covered in this evaluation
RX™抗震龙骨的杰出表现是基于特别的部件和安装方法的结合，其他制造商的部件和安装方法没有被测试并不被抗震规范所认可

- To provide an unrestrained ceiling system that will accommodate the movement of the structure during a seismic event and the objective is to have a free-floating ceiling.
提供一个无约束的天花板系统，发生地震时，这一系统能够适应结构的移动，其目标是要构造一种可以自由移动的天花板

Typical Applications

建议使用场所

- Offices 办公室
- Schools 学校
- Retail 零售商店
- Hotel/Hospitality 宾馆，休闲娱乐中心
- Hospital 医院

Visual Selection 视觉标准

Performance Selection 性能标准

GRID FACE 龙骨面宽	ITEM NUMBER 产品编号		DESCRIPTION 产品说明	DIMENSIONS 尺寸	REVEAL 线槽颜色	LOAD 承载 (Kg/m)	ASTM/DUTY CLASS 负荷等级
SILHOUETTE XL-45H 4000型45H XL尖峰顶端凹槽龙骨							
15mm	BP804082BI Notched 600mm OC 斜口间距 600mm OC		3600mm Main Beam 主龙骨	3600x15x45mm	Black Reveal 黑色	18.82	ID
15mm	BP803082BI Center Notched, both side 中间两边开斜口		1200mm Cross Tee 副龙骨	1200x15x45mm	Black Reveal 黑色		ID
15mm	BP803082BIA Unnotched 中间无斜口		1200mm Cross Tee 副龙骨	1200x15x45mm	Black Reveal 黑色		ID
15mm	BP802082BI		600mm Cross Tee 副龙骨	600x15x45mm	Black Reveal 黑色		ID
15mm	BP804082 Notched 600mm OC 斜口间距 600mm OC		3600mm Main Beam 主龙骨	3600x15x45mm	White Reveal 白色	18.82	ID
15mm	BP803082 Center Notched, both side 中间两边开斜口		1200mm Cross Tee 副龙骨	1200x15x45mm	White Reveal 白色		ID
15mm	BP803082A Unnotched 中间无斜口		1200mm Cross Tee 副龙骨	1200x15x45mm	White Reveal 白色		ID
15mm	BP802082		600mm Cross Tee 副龙骨	600x15x45mm	White Reveal 白色		ID
SILHOUETTE XL-38H 4000型38H XL凹槽龙骨							
15mm	BP804232BI Notched 600mm OC 斜口间距 600mm OC		3000mm Main Beam 主龙骨	3000x15x38mm	Black Reveal 黑色	12.2	LD
15mm	BP803032BI Center Notched, both side 中间两边开斜口		1200mm Cross Tee 副龙骨	1200x15x38mm	Black Reveal 黑色		LD
15mm	BP802032BI		600mm Cross Tee 副龙骨	600x15x38mm	Black Reveal 黑色		LD
15mm	BP804232 Notched 600mm OC 斜口间距 600mm OC		3000mm Main Beam 主龙骨	3000x15x38mm	White Reveal 白色	12.2	LD
15mm	BP803032 Center Notched, both side 中间两边开斜口		1200mm Cross Tee 副龙骨	1200x15x38mm	White Reveal 白色		LD
15mm	BP802032		600mm Cross Tee 副龙骨	600x15x38mm	White Reveal 白色		LD
MOLDING 边龙骨							
19mm	BPT1945H		3000mm Angle Molding 边龙骨	3000x19x19mm			—
14mm	BP784003		3600mm Shadow Molding 阶梯型便龙骨	3600x19x7x14mm			—
ACCESSORIES 配件							
	MCC4		Miter Closure Clip 斜切口遮盖件				

* HANGER SPACING 吊筋跨度 1200mm

ASTM Class 负荷等级
HD - Heavy-duty 重负荷
ID - Intermediate-duty 中等负荷
LD - Light-duty 轻负荷